







**CABLE DATA SHEET:**


Outside diameter	5 mm (0,200")
Max Power	10 KW RF @ 30Mhz
Costruction	Kevlar core - silver plated copper braid - PE insulation cover
Colour	Black
Coil	100 mt
Temperature range	- 100 + 155 C
Weight	26 g/m
DC resistance	37 Ohms/Km
Breaking load	6500 N ( 1433 lbs )

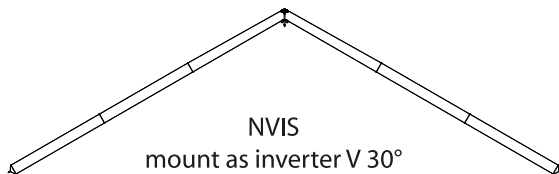

30° to ground arm position

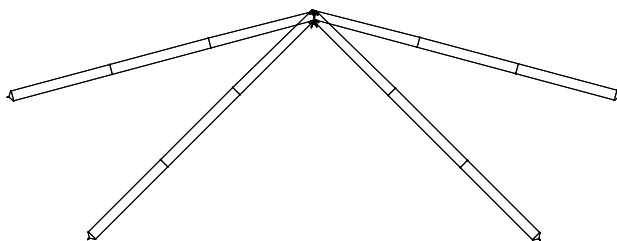

Two antenna cable crossing connection  
to 306° irradiation lobe

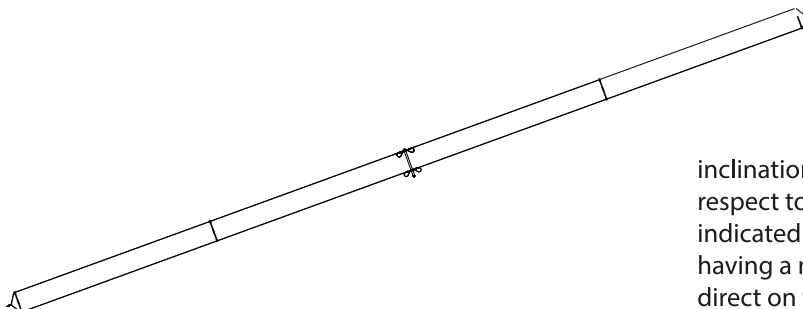

inclination of about 20 ° the straight antenna  
respect to the ground is obtained a  
indicated slope configuration for  
having a radiation lobe more  
direct on the horizontal plane